


4 LOAD CELL MILD STEEL SCALES



release date 14-09-2011

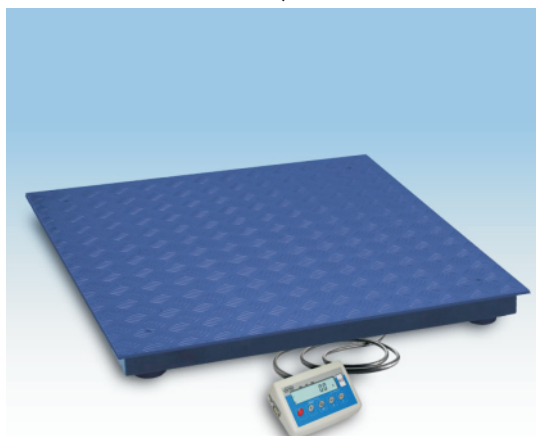

Measurement with application of 4 load cells is a guarantee of precise readout, regardless of load placing on the weighing platform.

WPT/4 platform scales feature 4 load cells are they are manufactured in mild steel technology. The indicator series PUE C/31 with backlit LCD display is installed on 3 m cable with possibility of hanging in on wall.

Scales are powered from mains or by batteries (6xAA), RS 232 output is offered as standard.

WPT/4 series is ready for installation in pit version which does not require application of ramps.



Counting pieces



Checkweighing



Summing function

Technical data:

	WPT/4 150 C6	WPT/4 300 C6	WPT/4 600 C6	WPT/4 1500 C6	WPT/4 150 C7	WPT/4 300 C7
Max capacity	150 kg	300 kg	600 kg	1500 kg	150 kg	300 kg
Readability	0,05 kg	0,1 kg	0,2 kg	0,5 kg	0,05 kg	0,1 kg
Tare range	-150 kg	-300 kg	-600 kg	-1500 kg	-150 kg	-300 kg
Pan size	800×800 mm	800×800 mm	800×800 mm	800×800 mm	1000×1000 mm	1000×1000 mm
Working temperature	-10° - +40 °C					
Output signal	RS 232					
Power supply	230V / 11V AC or 120V / 11V AC and 6×AA NiMH accumulator					
Display	LCD (backlit)					
Scale weight with indicator	55 kg	55 kg	55 kg	55 kg	80 kg	80 kg
Platform height	116 +/-6 mm	116 +/-6 mm	120 +/-10 mm	120 +/-10 mm	116 +/-6 mm	116 +/-6 mm

Technical data:

	WPT/4 600 C7	WPT/4 1500 C7	WPT/4 1500 C8	WPT/4 3000 C8	WPT/4 1500 C8/9	WPT/4 3000 C8/9
Max capacity	600 kg	1500 kg	1500 kg	3000 kg	1500 kg	3000 kg
Readability	0,2 kg	0,5 kg	0,5 kg	1 kg	0,5 kg	1 kg
Tare range	-600 kg	-1500 kg	-1500 kg	-3000 kg	-1500 kg	-3000 kg
Pan size	1000×1000 mm	1000×1000 mm	1200×1200 mm	1200×1200 mm	1200×1500 mm	1200×1500 mm
Working temperature	-10° - +40 °C					
Output signal	RS 232					
Power supply	230V / 11V AC or 120V / 11V AC and 6×AA NiMH accumulator					
Display	LCD (backlit)					
Scale weight with indicator	80 kg	80 kg	110 kg	110 kg	135 kg	135 kg
Platform height	120 +/-10 mm					

Technical data:

	WPT/4 1500 C9	WPT/4 3000 C9	WPT/4 3000 C10	WPT/4 6000 C10	WPT/4 3000 C11	WPT/4 6000 C11
Max capacity	1500 kg	3000 kg	3000 kg	6000 kg	3000 kg	6000 kg
Readability	0,5 kg	1 kg	1 kg	2 kg	1 kg	2 kg
Tare range	-1500 kg	-3000 kg	-3000 kg	-6000 kg	-3000 kg	-6000 kg
Pan size	1500×1500 mm	1500×1500 mm	1500×2000 mm	1500×2000 mm	2000×2000 mm	2000×2000 mm
Working temperature	-10° - +40 °C					
Output signal	RS 232					
Power supply	230V / 11V AC or 120V / 11V AC and 6×AA NiMH accumulator					
Display	LCD (backlit)					
Scale weight with indicator	160 kg	160 kg	230 kg	280 kg	290 kg	350 kg
Platform height	120 +/-10 mm	120 +/-10 mm	120 +/-10 mm	160 +/-10 mm	120 +/-10 mm	160 +/-10 mm

Technical data:

	WPT/4 300/600 C6	WPT/4 600/1500 C6	WPT/4 300/600 C7	WPT/4 600/1500 C7	WPT/4 600/1500 C8
Max capacity	600 kg	1500 kg	600 kg	1500 kg	1500 kg
Readability	0,1 / 0,2 kg	0,2 / 0,5 kg	0,1 / 0,2 kg	0,2 / 0,5 kg	0,2 / 0,5 kg
Tare range	-600 kg	-1500 kg	-600 kg	-1500 kg	-1500 kg
Pan size	800×800 mm	800×800 mm	1000×1000 mm	1000×1000 mm	1200×1200 mm
Working temperature	-10° - +40 °C				
Output signal	RS 232				
Power supply	230V / 11V AC or 120V / 11V AC and 6×AA NiMH accumulator				
Display	LCD (backlit)				
Scale weight with indicator	55 kg	55 kg	80 kg	80 kg	110 kg
Platform height	116 +/-6 mm	120 +/-10 mm	116 +/-6 mm	120 +/-10 mm	120 +/-10 mm

Technical data:

	WPT/4 1500/3000 C8	WPT/4 600/1500 C8/9	WPT/4 1500/3000 C8/9	WPT/4 600/1500 C9	WPT/4 1500/3000 C9
Max capacity	3000 kg	1500 kg	3000 kg	1500 kg	3000 kg
Readability	0,5 / 1 kg	0,2 / 0,5 kg	0,5 / 1 kg	0,2 / 0,5 kg	0,5 / 1 kg
Tare range	-3000 kg	-1500 kg	-3000 kg	-1500 kg	-3000 kg
Pan size	1200×1200 mm	1200×1500 mm	1200×1500 mm	1500×1500 mm	1500×1500 mm
Working temperature	-10° - +40 °C				
Output signal	RS 232				
Power supply	230V / 11V AC or 120V / 11V AC and 6×AA NiMH accumulator				
Display	LCD (backlit)				
Scale weight with indicator	110 kg	135 kg	135 kg	160 kg	160 kg
Platform height	120 +/-10 mm				

Technical data:

	WPT/4 1500/3000 C10	WPT/4 3000/6000 C10	WPT/4 1500/3000 C11	WPT/4 3000/6000 C11
Max capacity	3000 kg	6000 kg	3000 kg	6000 kg
Readability	0,5 / 1 kg	1 / 2 kg	0,5 / 1 kg	1 / 2 kg
Tare range	-3000 kg	-6000 kg	-3000 kg	-6000 kg
Pan size	1500×2000 mm	1500×2000 mm	2000×2000 mm	2000×2000 mm
Working temperature	-10° - +40 °C			
Output signal	RS 232			
Power supply	230V / 11V AC or 120V / 11V AC and 6×AA NiMH accumulator			
Display	LCD (backlit)			
Scale weight with indicator	230 kg	280 kg	290 kg	350 kg
Platform height	120 +/-10 mm	160 +/-10 mm	120 +/-10 mm	160 +/-10 mm

Additional equipment:

RACK FOR INDICATOR	IMPACT PRINTER "EPSON" TM-U220D, TM-U220B, TM-U220A
LCD ADDITIONAL DISPLAY	COMPUTER SOFTWARE: PW-WIN, RAD-KEY, REC-FS, LS-FS
LARGE SIZE ADDITIONAL DISPLAY	RS 232/RS 485 CONVERTER
THERMAL PRINTER KAFKA 1, 1/2, SQS	RAMP FOR PIT VERSION

RADWAG

26-600 Radom • Bracka Street 28 • POLAND • Phone: +48 48 3848800 • Fax: +48 48 3850010 • www.radwag.com • e-mail:export@radwag.com